


# EKOMAXX 800

-  **Commercial Waste**  
Ø 12 – 25 t/h
-  **Rubber and Waste Tires**  
Ø 7 – 15 t/h
-  **Green Waste**  
Ø 35 – 80 t/h
-  **Trunk Wood**  
Ø 15 – 35 t/h
-  **Waste Wood**  
Ø 20 – 50 t/h
-  **Paper and Cardboard**  
Ø 15 – 30 t/h

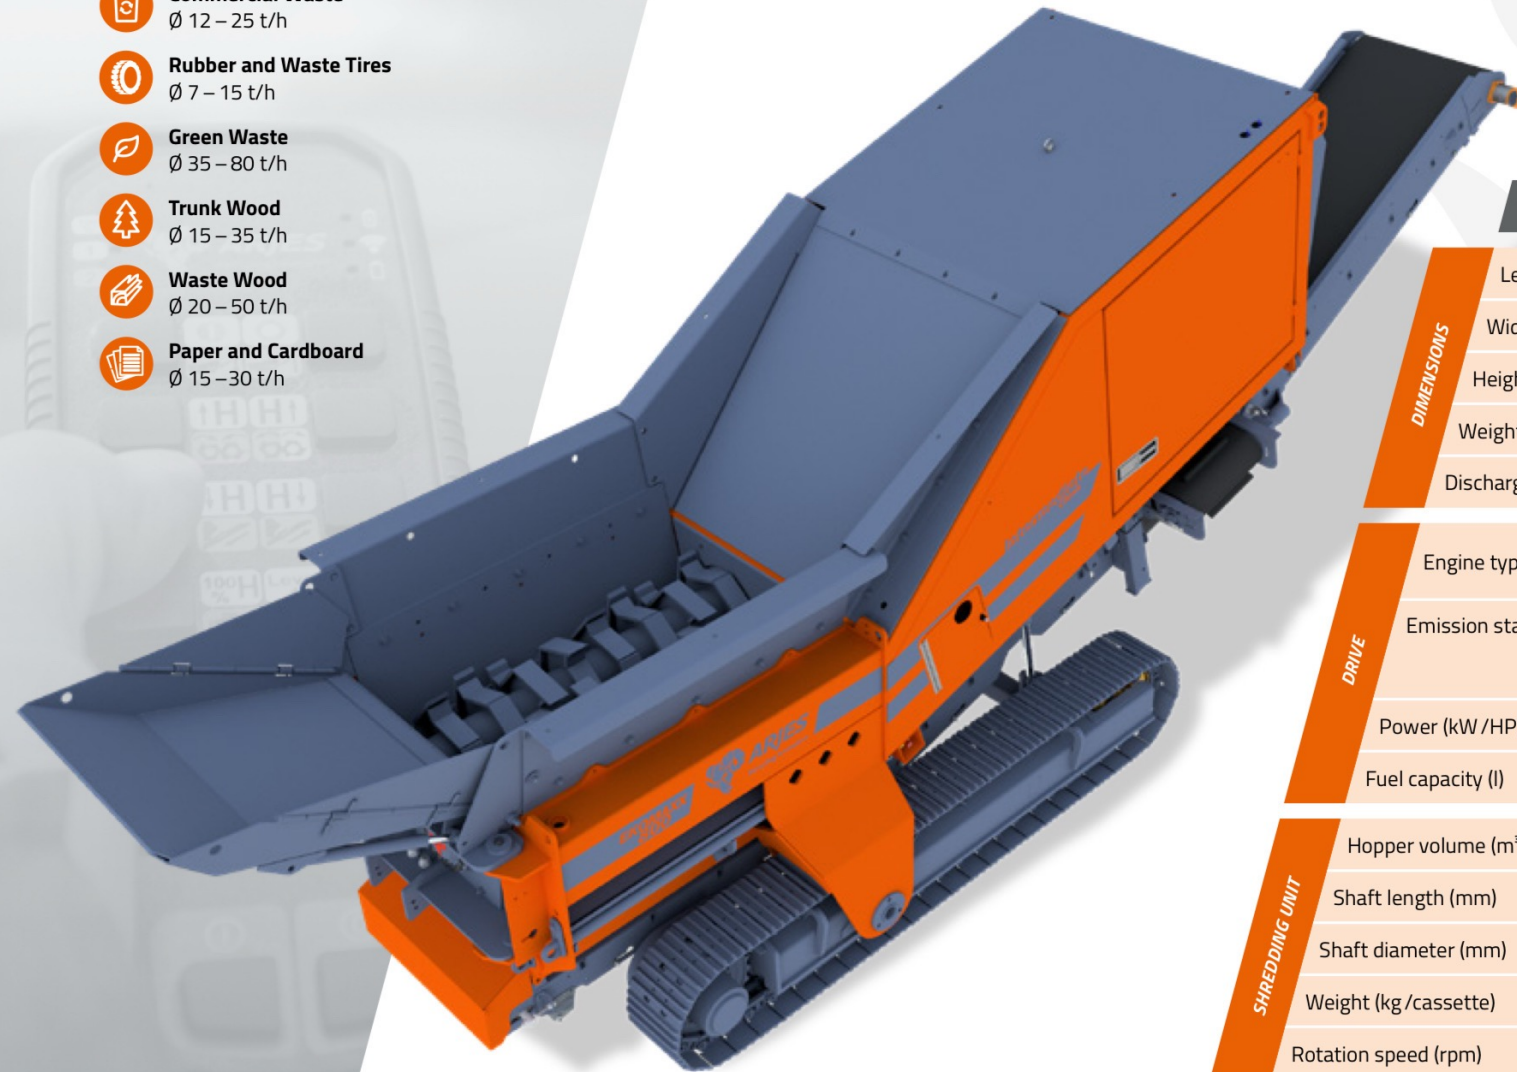

## Technical Data

<b>DIMENSIONS</b>	Length (mm)	9,900 / 8,100 (transport)
	Width (mm)	2,450 / 2,450 (transport)
	Height (mm)	4,000 / 3,100 (transport)
	Weight (kg)	21,000
	Discharge height (mm)	3,300
<b>DRIVE</b>	Engine type	Diesel - TAD 883 VE (EU/US) Diesel - TAD 853 VE (ROW)**
	Emission standard	Stage V (EU) / EPA Tier IV (US) Stage III A (ROW)**
	Power (kW / HP)	235 / 320
	Fuel capacity (l)	400
<b>SHREDDING UNIT</b>	Hopper volume (m <sup>3</sup> )	4.5 (incl. tilting hopper)
	Shaft length (mm)	2,000
	Shaft diameter (mm)	680
	Weight (kg / cassette)	3,500
	Rotation speed (rpm)	42

\*Recommended retail price FCA plus applicable VAT and additional costs (transport, insurance, customs, etc.) as well as optional attachments

\*\*Rest of the world (country-specific requirements) / Subject to technical changes and misprints. Status: January 2025