


COMPAKTOR 300

-  **Construction Waste**
Ø 80 – 100 t/h
-  **Waste Wood**
Ø 5 – 15 t/h
-  **Green Waste**
Ø 12 – 25 t/h
-  **Rubber and Waste Tires**
Ø 6 – 12 t/h
-  **Commercial Waste**
Ø 5 – 15 t/h
-  **Aluminium**
Ø 10 – 15 t/h

Technical Data

DIMENSIONS	Length (mm)	7,800 / 7,200 (transport)
	Width (mm)	2,300 / 2,300 (transport)
	Height (mm)	3,700 / 2,600 (transport)
	Weight (kg)	15,000
	Discharge height (mm)	3,100
DRIVE	Engine type	Diesel - TAD 582 VE (EU/US) Diesel - TAD 551 VE (ROW)**
	Emission standard	Stage V (EU) / EPA Tier IV (US) Stage III A (ROW)**
	Power (kW / HP)	160 / 220
	Fuel capacity (l)	330
SHREDDING UNIT	Hopper volume (m ³)	2.25
	Shaft length (mm)	1,500
	Shaft diameter (mm)	680
	Weight (kg/cassette)	3,100
	Rotation speed (rpm)	38

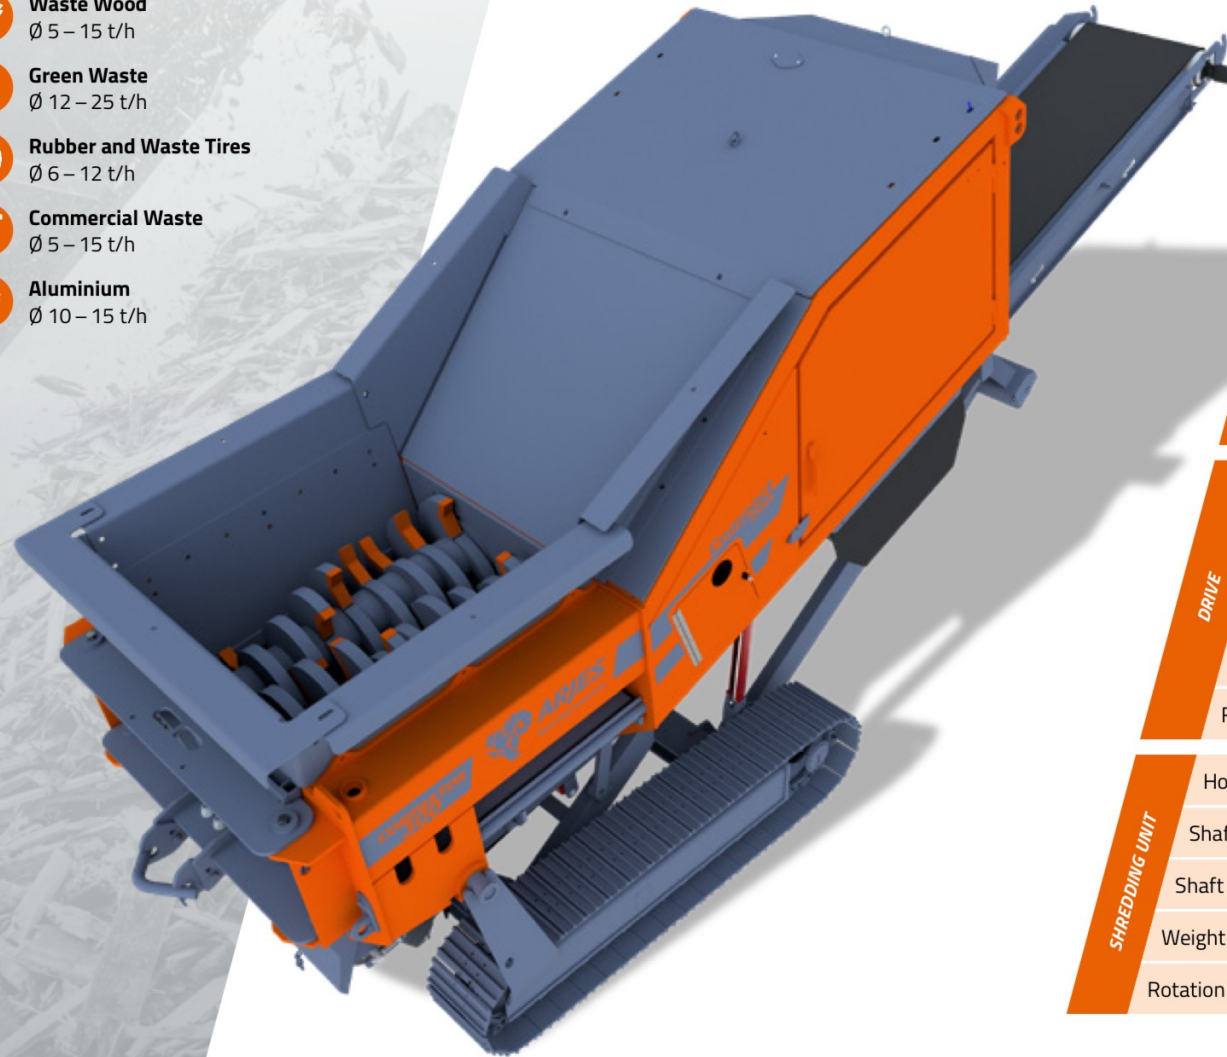

*Recommended retail price FCA plus applicable VAT and additional costs (transport, insurance, customs, etc.) as well as optional attachments

**Rest of the world (country-specific requirements) / Subject to technical changes and misprints. Status: January 2025